

GENERGY

GZE0607-C



2014/30/EU (EN55032:2015/A11:2020-EN55035:2017/A11:2020-EN IEC 61000-3-2:2019-EN61000-3-3:2013+A1:2019)
EMC 2014/35/EU (EN62368-1:2014+A11:2017) LVD 2011/65/EU RoHS UN38.3

FICHA TÉCNICA - TECHNICAL DATA SHEET





	MODELO	GZE0607-C
	Capacidad / Capacity	576Wh
	Tipo de batería / Battery Type	LiFePO4
	Ciclo de vida de batería / Battery Lifecycle	4000 ciclos > 70% - 3500 ciclos > 80%
SALIDAS/OUTPUT	Salida 230V / 230V output	700W
	Pico 230V / 230V output	1200W
	Salida energía / Power Output	Pure sine wave
	SCHUKO 230V	1
	USB-C PD 18W MAX (5V/3A) (9V/2A) (12V/1.5A)	1
	USB-C2 5V 3A; 9V 3A; 12V 3A; 15V 3A; 20V 5A; 28V 5A-Máx. 140W	1
	USB-A QC 3.0 18W MAX (5V/3A) (9V/2A) (12V/1.5A)	2
	Puerto coche / Car ports	12V/8A
	Puertos totales / Total No Ports	5
ENTRADAS/INPUT	Entrada 230V / 230V Input	400W
	Tiempo de carga completa / Full charging time	0-100% 90Min 0-80% 80Min
	Entrada panel solar / Input solar panel	XT60 INPUT (240W 15-35V/12A)
	Entrada carga de coche	Si
	Control panel solar / Panel solar controller	MPPT
	Panel solar compatible / Recommended solar panel	SUN 100W – SUN 200W
	Tiempo de carga desde panel / Panel solar charging time	Depende de la cantidad y la potencia de los paneles Depends on the quantity and power of the panels
	Carga-salida simultánea / Simultaneous Charging-Output	OK
	Medidas / Size	242x230x185mm
	Peso / Weight	6.3kg
	Accesorios / Accessories	Cables carga AC– Manual / Charging line AC - Manual
	Referencia / Reference	31678

DESTACADO / HIGHLIGHT

Carga ultrarrápida en 90 minutos. De 0 al 80% en 80 minutos.

Batería **LifePO4** de última generación: 4000 ciclos > 70% - 3500 ciclos > 80%.

BMS: Sistema inteligente para la gestión de la batería.

MPPT: Seguidor de punto de máxima potencia, mayor rendimiento de carga desde paneles solares.


Ultra-fast charging in 90 minutes. From 0 to 80% in 80minutes.

Latest generation **LifePO4** battery: 4000 cycles > 70% - 3500 cycles > 80%.

BMS: Intelligent system for battery management.

MPPT: Maximum Power Point Tracker, higher charging performance from solar panels.


FORMAS DE CARGA / CHARGING METHODS

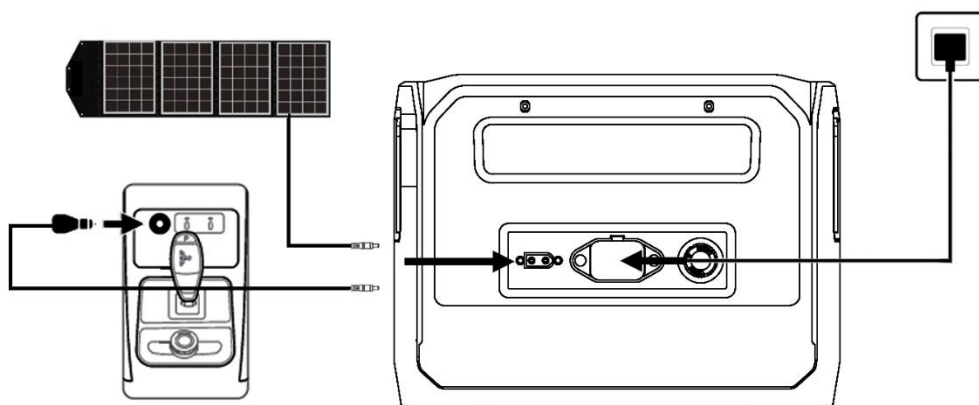

CONEXIÓN PANEL SOLAR / SOLAR PANEL CONECTION


MAX SOLAR PANEL 240W

Panel no incluido
Panel not included

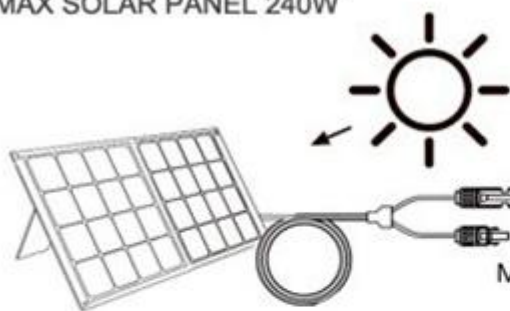



CABLE SOLAR
REF-31628

MC4

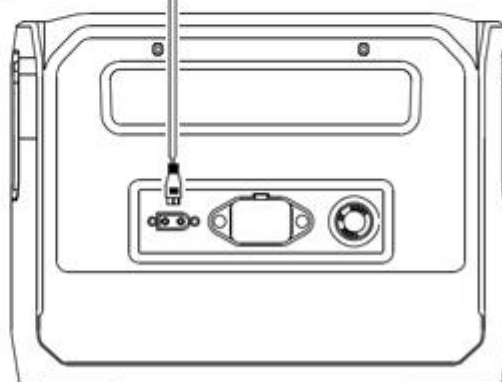


INPUT SOLAR
MIN 15V
MAX 35V
MAX 12A

COMPONENTES / COMPONENTS

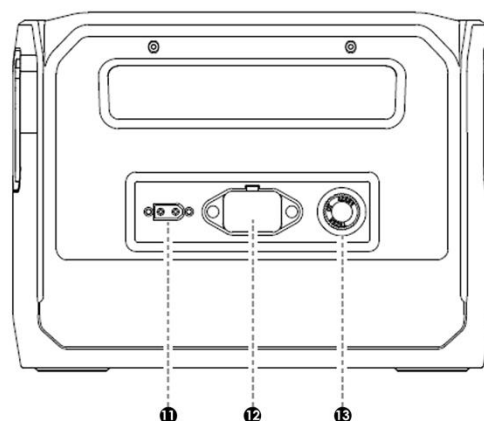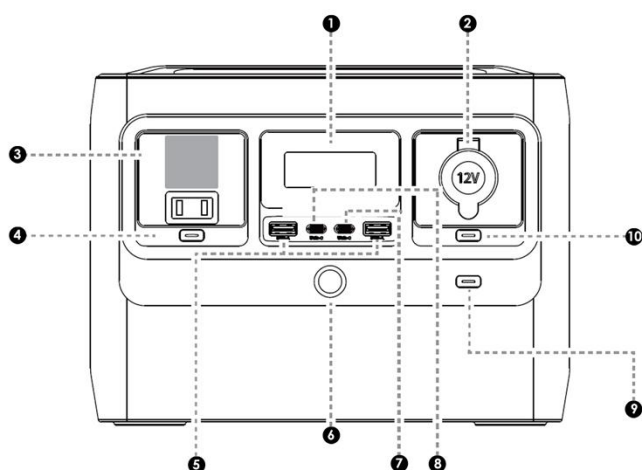

ESP	ENG
1-Pantalla LCD	1-LCD Screen
2-Salida tipo mechero coche	2-Output car socket
3-Salida AC230V	3-AC230V output
4-Botón de encendido de salida AC	4-AC output power button
5-Salida USB-A	5-USB-A Output
6-Interruptor general de encendido ON/OFF	6-Main power ON/OFF switch
7-Salida USB-C	7-USB-C Output
8-Salida USB-C 140W	8-USB-C Output 140W
9-Botón IOT	9- IOT button
10- Interruptor ON/OFF de salida DC	10- DC output power ON/OFF switch
11- Puerto de entrada solar / coche	11- Solar / car input port
12- Puerto de entrada AC	12- AC input port
13- Protección de entrada AC	13- AC input protection

DIMENSIONES / SIZE

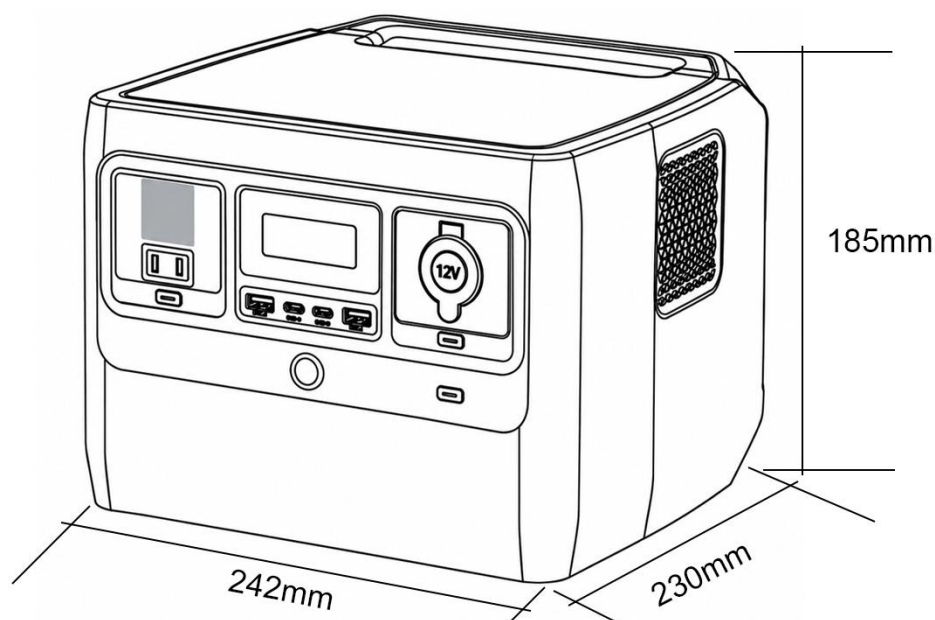

PANEL CONTROL / CONTROL PANEL

